



PENNIE & EDMONDS LLP
 COUNSELLORS AT LAW
 1155 Avenue of the Americas
 New York, N.Y. 10036-2711
 (212) 790-9090

A

ATTORNEY DOCKET NO. 9797-022-999Date: July 14, 1999

Assistant Commissioner for Patents
 Box PATENT APPLICATION
 Washington, D.C. 20231

Sir:

The following utility patent application is enclosed for filing:

Applicant(s): **STEPHANOS SIDIROPOULOS**Executed on: **July 1, 1999**Title of Invention: ***Apparatus and Method for Controlling a Master/Slave System via Master Device Synchronization*****PATENT APPLICATION FEE VALUE**

TYPE	NO. FILED	LESS	EXTRA	EXTRA RATE	FEE
Total Claims	20	-20	0	\$18.00 each	\$ 0.00
Independent	4	-3	1	\$78.00 each	\$ 78.00
Minimum Fee					\$ 760.00
Multiple Dependency Fee If Applicable (\$260.00)					\$ 0.00
Total					\$ 838.00
50% Reduction for Independent Inventor, Nonprofit Organization or Small Business Concern (a verified statement as to the applicant's status is attached)					- \$ 0.00
Total Filing Fee					\$ 838.00

Also enclosed:

- ☒ Five (5) sheets of formal drawings (6 figures);
- ☒ An executed Declaration by the inventor;
- ☒ A Power of Attorney by Assignee; and
- ☒ An Assignment document.

Please charge the required fee to Pennie & Edmonds LLP Deposit Account No. 16-1150 (order no. 9797-022-999). A copy of this sheet is enclosed.

Respectfully submitted,

33,885

William S. Galliani
 PENNIE & EDMONDS LLP

(Reg. No.)

Enclosures

This form is not for use with continuation, divisional, re-issue, design or plant patent applications.

APPARATUS AND METHOD FOR CONTROLLING A MASTER/SLAVE SYSTEM VIA MASTER DEVICE SYNCHRONIZATION

Brief Description of the Invention

This invention relates generally to master/slave digital systems. More particularly, this invention relates to a master/slave digital system in which the master device performs all synchronization operations, thereby obviating the need for phase
5 alignment circuitry on slave devices.

Background of the Invention

Synchronous bus systems have been developed to support higher bandwidth digital systems. In a synchronous bus system, data packets are sent between a master
10 device and one or more slave memory devices. The data packets travel in parallel with a system clock and maintain a precise phase to that clock. Typically, synchronous memory systems utilize a phase adjusting circuit on the master and on each one of the slave devices in order to align the on-chip receive and transmit clocks to maximize the reception timing margins both on the master and slave devices. U.S.
15 Patents 5,432,823 and 5,513,327, which are assigned to the assignee of the present invention and which are expressly incorporated by reference herein, describe synchronous memory systems with phase adjusting circuitry on both master and slave devices.

The primary disadvantage of using phase alignment circuitry in every slave
20 device of a master/slave system is that it increases power dissipation. For example, if the "standby" power of phase alignment circuitry, such as a Delay Locked Loop, is 125 mW, a system with 32 slave devices on standby mode will dissipate a total of 4W. This power dissipation is prohibitively large for emerging portable applications.

In view of the foregoing, it would be highly desirable to provide a master/slave
25 system in which the slave devices do not require phase alignment circuitry, thereby

allowing the master/slave system to operate with substantially reduced power dissipation.

Summary of the Invention

5 A method of operating a master/slave system includes the step of identifying a master receive data phase value to coordinate the transfer of data from a slave device without phase alignment circuitry to a master device with a universal phase aligner. Data is transferred from the slave device to the master device in accordance with the master receive data phase value. The master device characterizes a master transmit
10 data phase value to coordinate the transfer of data from the master device to the slave device. Subsequently, the master device routes data to the slave device in accordance with the master transmit data phase value.

 A master/slave system includes a set of slave devices, with each slave device having a clock circuit without phase alignment circuitry. A master device with a
15 universal phase alignment circuit includes a phase value register bank storing a set of phase values for the set of slave devices. The master device utilizes a selected phase value of the set of phase values to alter a system clock signal in accordance with the selected phase value so as to establish synchronous communication between the master device and a selected slave device of the set of slave devices.

20 The invention provides a master/slave system in which the slave devices do not require phase alignment circuitry. Thus, the master/slave system operates with substantially reduced power dissipation. The apparatus of the invention can be operated in a high throughput mode wherein each slave device is assigned a first phase delay value for data transmission and a second phase delay value for data reception.
25 In a simpler, lower throughput mode, individual phase delay values are not stored. Instead, the master designates different slave devices to process different data edges, depending upon the phase information the master device receives during a calibration operation.

Brief Description of the Drawings

For a better understanding of the invention, reference should be made to the following detailed description taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates a master/slave system constructed in accordance with an embodiment of the invention.

FIGURE 2 illustrates a universal phase aligner, in accordance with an embodiment of the invention, for use in the system of Figure 1.

FIGURE 3 illustrates a master receive data calibration method executed in accordance with an embodiment of the invention.

FIGURE 4 illustrates a master receive data operation executed in accordance with an embodiment of the invention.

FIGURE 5 illustrates a master transmit data calibration method executed in accordance with an embodiment of the invention.

FIGURE 6 illustrates a master transmit data operation executed in accordance with an embodiment of the invention.

Like reference numerals refer to corresponding parts throughout the drawings.

Detailed Description of the Invention

Figure 1 illustrates a master/slave system 20 constructed in accordance with an embodiment of the invention. The system 20 includes a master device 22 and a set of slave devices 24. Figure 1 illustrates a single slave device 24 for the purpose of simplicity. However, it should be appreciated that the system 20 includes many slave devices 24, each of which is configured as the device shown in Figure 1. The master device 22 includes a universal phase aligner 30, which operates to coordinate the phase alignment in all communications between the master device 22 and the slave devices 24. In other words, the universal phase aligner 30 obviates the need for phase alignment circuitry in each of the slave devices 24. In the absence of phase alignment circuitry in each of the slave devices 24, the master/slave system 20 dissipates a relatively small amount of power.

Figure 1 illustrates that the master device 22 includes logic and control circuitry 32. The operation and implementation of the logic and control circuitry 32 is

independent of the invention, since the universal phase aligner 30 may be used with practically any type of logic and control circuitry 32.

In the embodiment of Figure 1, the universal phase aligner 30 produces a system clock (SYSCLK) on line 33. In an alternate embodiment, the system clock on
5 line 33 is generated by a separate clock source that is external to the universal phase aligner 30. The universal phase aligner 30 also produces a master request clock (MRQCLK) signal, which controls the timing of an output buffer 34. The output buffer 34 receives slave access request control and data signals from the logic and control circuitry 32. The output buffer 34 applies the signals to a request bus 40. An
10 output buffer 34 is provided for each line of the request bus 40.

The universal phase aligner 30 also produces a master receive data clock (MRDCLK) signal, which is used to control a latch 36, which may be a flip-flop. The latch 36 latches data from the data bus 42. The data bus 42 carries data to and from the master device 22 (i.e., the data bus 42 is bi-directional). A latch is provided for
15 each line of the data bus 42.

As discussed below, the MRDCLK signal is a phase adjusted system clock signal for a selected slave device 24. The MRDCLK signal is synchronized to data received from the selected slave device of the master/slave system 20. The MRDCLK signal accounts for the time between when the system clock is used to launch data
20 from a slave device 24 and the time that the data is received at the master device. By accounting for this time difference, expressed as a phase difference between the system clock and the MRDCLK, the slave device 24 and the master device 22 can exchange data in phase.

The universal phase aligner 30 also produces a master transmit data clock (MTDCLK) signal, which controls the timing of an output buffer 38. The output
25 buffer 38 drives data from the logic and control circuitry 32 onto the data bus 42. An output buffer 38 is provided for each line of the data bus 42.

As discussed below, the MTDCLK signal is a phase adjusted system clock signal for a selected slave device 24. The MTDCLK signal is synchronized to
30 transmit data, such that the selected slave device of the master/slave system 20 receives the data in phase with the system clock. The MTDCLK signal accounts for the time between launching data from the master 24 to the time that it is received at

the slave 24. This time difference, expressed as a phase difference between the system clock and the MTDCLK, allows the master device 22 to launch data in a manner such that it is received at a selected slave device 24 in phase with the system clock.

5 Figure 1 further illustrates a side band (SB) bus 46 connected to the logic and control circuitry 32. The side band bus 46 may be implemented as a slow bus, such as a daisy chain, which carries control signals that are not time critical.

Each slave device 24 of the master/slave system 20 includes a clock circuit 50 and a set of logic and control circuitry 52. The clock circuit 50 does not include any
10 type of phase alignment circuitry. Instead, it is merely implemented with an amplifier, a buffer, and duty cycle correction circuitry, if necessary. The amplifier and buffer may be used to amplify and buffer the system clock (SYSCLK) received from line 33. The amplified and buffered system clock (SCLKO) is used to gate a request bus flip-flop 54, a data bus input flip-flop 56, and a data bus output buffer 58.
15 The request bus flip-flop 54 is attached to the request bus 40, while the data bus input flip-flop 56 and the data bus output buffer 58 are connected to the data bus 42. Flip-flops 56 and output buffers 58 are provided for each line of the request bus 40 and data bus 42. The implementation of the logic and control circuitry 52 is inapposite to the invention, as a variety of logic and control functions may be implemented in
20 accordance with the synchronization scheme of the invention.

The operations performed by the components of Figure 1 are more fully appreciated with reference to Figure 2, which illustrates a universal phase aligner 30 constructed in accordance with an embodiment of the invention.

The universal phase aligner 30 may include a standard system clock source 60.
25 Alternately, an external system clock may be used. The system clock signal (SYSCLK) is applied to line 33 of Figure 1 and to a phase rotator 62. As its name implies, the phase rotator 62 operates to rotate the phase of the system clock (SYSCLK) in accordance with a value specified by a phase error signal. The phase rotator 62 may be implemented with a phase-locked loop, a delayed lock loop, or
30 equivalent device known to those skilled in the art.

The output of the phase rotator 62 is an adjusted system clock signal, which may be the previously described master request clock (MRQCLK), master receive

data clock (MRDCLK), or the master transmit data clock (MTDCLK). The adjusted system clock signal is applied to a flip-flop 64, which also receives a clock signal from a selected slave device. In particular, a signal is received at latch 36 of Figure 1. A synchronizer 66 operates to stabilize the output from the flip-flop 64. The synchronizer 66 may be implemented as a series of flip-flops.

A counter 68 is used to quantify the phase difference between the adjusted clock signal and the clock signal received from the selected slave device. For example, the counter 68 may be implemented to count digital values read from the flip-flop 64. In such an embodiment, the flip-flop 64 may be timed by a digital high adjusted clock signal. A digital high output from the flip-flop 64 indicates that the clock signal from the slave device is at a digital high value at the same time as the adjusted clock signal. Thus, the signal from the slave device has arrived at the flip-flop 64. On the other hand, a low output from the flip-flop 64 indicates that the clock signal from the slave device has not been received at the flip-flop 64. In such a case, the counter is incremented to adjust for the phase error. When phase alignment is achieved, the counter 68 stores a counter value indicating the phase difference between the adjusted clock signal and the clock signal received from the selected slave device.

At this time, a controller 70 reads the counter value in the counter 68. The phase difference value read from the counter is then stored in a phase value register bank 74. In particular, the phase difference value is stored in a register corresponding to the selected slave device. Recall that the stored value specifies a phase value adjustment to the system clock that will match the clock signal received from the selected slave device to the adjusted clock signal. Since the signals are matched, each signal transition will occur at the same time. This may result in metastability problems as the signals are latched into different devices. To avoid this problem, an offset adder 72 is used to add an offset value to the phase value received from the counter 68. The offset improves data reception timing margins. By way of example, the offset may be 90 degrees.

Later when the master 22 communicates with a selected slave device 24, the phase value for the selected slave device is retrieved by the controller 70 from the phase value register bank 74. The controller 70 then loads the value into the counter

68 and disables the counter. Thus, the same phase value is applied to the phase rotator 62 with every clock cycle. This results in a phase rotation of the system clock (SYSCLK) to correspond to the specified phase value.

Each of the components of Figure 2 has now been described. Attention
5 presently turns to a more detailed discussion of the operation of the components of Figure 2 in the context of the system of Figure 1.

As previously indicated, the master/slave system of Figure 1 does not include clock phase alignment circuitry in the slave devices 24. Instead, all clock phase alignment is performed by the master device 22 for each slave device in the system
10 20. The master device 22 initially performs two calibration operations: a master data receive calibration and a master transmit data calibration. The master data receive calibration operation is performed to identify the phase value to be used for receiving data from a selected slave device. The phase value obtained from the master data receive calibration is used during a master data receive operation. More particularly,
15 the phase value is used to adjust the system clock so that a receiver of the master device 22, operating in response to the adjusted system clock, receives data in phase from a selected slave device, which is operating in response to the system clock.

The master transmit data calibration operation is performed to identify the phase value to be used to transmit data to a selected slave device. The phase value
20 secured during the master transmit data calibration operation is used during a master transmit data operation. That is, the phase value is used to adjust the system clock so that an output buffer of the master device 22, operating in response to the adjusted system clock, transmit data that is in phase with the system clock as received at the selected slave device.

25 The master data receive calibration operation 80 is disclosed in connection with Figure 3. Initially, a selected slave device applies an alignment signal to the data bus (step 82). This step may be initiated by a command on the side band bus 46. Thus, for example, the logic and control circuitry 32 of the master device 22, may apply a signal to the side band bus 46, which causes the selected slave device 24 to
30 generate a periodic signal that is applied to the data bus 42. By way of example, the periodic signal may be a sequence of on and off digital pulses (i.e., a clock signal) generated by the logic and control circuitry 52 and applied to the bus 42 via buffer 58.

The master device 22 receives these signals at latch 36. Latch 36 is controlled by the clock signal MRDCLK. Initially, the MRDCLK signal is simply the system clock SYSCLK (the phase rotator 62 has not applied a phase error to the system clock). The universal phase aligner 30 subsequently aligns the MRDCLK signal with the alignment signal received from the selected slave device (step 84). As previously discussed, the counter 68 quantifies the phase error between the MRDCLK signal and the alignment signal. When alignment is achieved, the counter 68 holds the phase value that achieved alignment. Thus, the next processing step can be characterized as the master quantifying the phase value between the system clock and the MRDCLK clock (step 86).

The next processing step of Figure 3 is to have the master apply a margin offset to the phase value (step 88). As discussed in connection with Figure 2, an offset adder 72 is used to add an offset to the phase value to improve the processing margin and thereby avoid metastability problems. The final processing step shown in Figure 3 is to have the master store the receive phase value for the selected slave device (step 90). In other words, the phase value determined by the calibration operation 80 is stored in a register of the phase value register bank 74, the selected register corresponding to the slave device that was just calibrated.

A decision is then made to determine whether all of the slave devices have been calibrated (step 92). If not, a calibration operation for the next slave device in the system is initiated with step 82. Once all of the slave devices in the system have been calibrated to obtain a data receive phase value, the calibration operation 80 is completed.

Figure 4 illustrates a master data receive operation 100 in accordance with an embodiment of the invention. If the master device 22 is to receive data from a selected slave device, then the controller 70 retrieves the phase value for the selected slave device from the phase value register bank 74. The controller 70 then passes the phase value to the counter 68 and disables the counter. As a result, the counter continuously applies the established data receive phase value to the phase rotator 62. Accordingly, the phase rotator 62 rotates the system clock (SYSCLK) to produce a phase adjusted MRDCLK signal that is appropriately aligned (with offset) with the incoming data from the selected slave device. These operations can be summarized

with the processing steps shown in Figure 4. In particular, a first step entails controlling the phase rotator 62 in accordance with the data receive phase value for the selected slave device (step 102), and a second step of receiving data from the selected slave device in response to the MRDCLK signal produced by the phase aligner (step 5 104).

The master transmit data calibration operation 110 of the invention is disclosed in connection with Figure 5. The first processing step of Figure 5 is to have a selected slave device 24 route request bus data to the data bus 42 as re-routed request bus data (step 112). That is, the master device 22 advises the slave device 24, for example via 10 a signal on the side band bus 46, to re-route request bus data in the form of a set of digital high and low signals forming a clock signal. The logic and control circuitry 52 of the slave device 24 then re-routes the data from the latch 54 to the buffer 58.

The master device 22 then aligns the master request clock (MRQCLK) until it corresponds to the re-routed request bus data at the slave device 24. Observe that in 15 this case, the phase difference created by the distance on the data bus 42 from the selected slave device 24 to the master device 22 is accounted for by the data receive phase value for the selected slave device, which was obtained during the master data receive calibration. Thus, the present calibration operation measures the phase difference created by data traveling from the master device 22 to the selected slave 20 device 24. That is, the present calibration operation measures the phase difference created by data traveling on the request bus 40 between the master device 22 and the selected slave device 24.

In sum, the master device 22 aligns the MRQCLK signal with the re-routed request bus data to form a master transmit phase aligned MRQCLK signal for the 25 selected slave device (step 114). As previously discussed in connection with Figure 2, the value in the counter 68 is adjusted until the a phase error signal from the counter allows the phase rotator 62 to phase rotate the system clock (SYSCLK) until it is in phase with the re-routed request bus data.

After alignment is achieved, the master has quantified the phase value between 30 the system clock and the master transmit phase aligned MRQCLK signal (step 116). The master then applies a margin offset to the phase value (step 118). As previously discussed, this is performed by the offset adder 72 to improve timing margins. The

master then stores the offset adjusted transmit data phase value for the selected slave device (step 120). If all of the slave devices have not been calibrated in this manner (step 122), then the processing of Figure 5 is executed for the next slave device in the system. If each of the slave devices has been calibrated to obtain a transmit data phase value, then the calibration operation is complete.

The master transmit data operation 130 is executed in accordance with the method of Figure 6. The phase rotator is controlled in accordance with the transmit data phase value for the selected slave device (step 132). The transmit data phase value is the phase value that produced the MRQCLK signal that was aligned with the re-routed data. The phase rotator 62 processes the transmit data phase value to produce a master transmit data clock signal (MTDCLK). Data is then transmitted to the selected slave device in response to the MTDCLK signal produced by the phase rotator (step 134).

In sum, after the master data receive calibration operation of Figure 3 and the master transmit data calibration operation of Figure 5 are performed, data is exchanged between the master 22 and the slave 24 according to the master data receive operation of Figure 4 and the master transmit data operation of Figure 6. The system needs to be re-calibrated according to the operations of Figures 3 and 5 periodically to compensate for drifts in operating conditions.

Attention presently turns to the master device's transfer of communication between different slave devices 24. There is a latency associated with any such transfer of control. The factors that affect hand-over or switching latency include: (1) switching the phase of the master clock to the appropriate phase for the active slave and (2) informing a slave that it is currently active or inactive. The operation of switching the phase of the master clock to the appropriate phase for the active slave can be limited to below 1-2 cycles by pipelining techniques (e.g., switching the phase of the MRQCLK before switching the MRDCLK).

There are a number of techniques that may be used to inform a slave that it is currently active or inactive. For example, a signal on the side band bus 46 may be used. While this is an acceptable solution in some systems (e.g., graphics memory subsystems), this solution might not be tolerable in systems where the master

addresses different slaves frequently (e.g., main memory systems with data fragmentation).

Another technique for advising a slave device of its status is to use the request bus 40. In this embodiment, an additional "broadcast" bit is needed by the request bus 40. To accomplish an "active hand-over", the master 22 transmits a "broadcast" packet on the request bus 40. This packet is transmitted with a pre-determined phase of the MRQCLK and is valid for a full clock cycle (i.e., two bit time periods). All the inactive slaves 24 continuously sample the data on the request bus 40 with both of their negative and positive clock edges. However, they always disregard the data sampled with one of the two edges according to their local phase. In other words, depending upon the position of the slave device in the physical system, it will sample one of the two edges of the data. Thus, the slave device is effectively operating at half-frequency during this state. The decision as to which datum to process and which to disregard is made by the master and is communicated to the slave during the calibration phase. Since the broadcast bit is valid for a full clock cycle, one of the two slave clock edges is appropriate for receiving the broadcast bit and the data on the request bus 40 with adequate timing margin.

When the broadcast bit is a logical ONE, the master 22 broadcasts data on the request bus 40 specifying which slave is being invoked. Each slave 24 processes this broadcast data to determine if the broadcast data matches its specified identification value. If the comparison results in a match, the slave goes to the active mode. In the active mode, data on the request bus 40 and data bus 42 are processed at full speed (i.e., on both clock edges).

An additional consideration for the active "hand-over" is the amount of time that the slaves might have to wait before they start transmitting data on the bus so that their data will not collide with the data transmitted by the previously active slave (or reflections of that data). This amount of time depends on the electrical length of the bus.

The system of the invention can operate in a low power mode that is analogous to the active hand-over mode just discussed. In the low power mode, the phase of the master clock is pre-determined (e.g., it is locked to the system clock). Thus, the master does not change the phase of its clocks according to which slave is active.

Unlike the previous high bandwidth embodiment in which two bits of data are transmitted every clock cycle, in this embodiment only one datum is transmitted per clock cycle.

During calibration for this mode, the master informs each slave which of its two clock edges to use when it receives and transmits data to and from the request bus 40 and data bus 42. The master chooses the slave transmit clock edge that produces the maximum timing margin on the master's receivers. The maximum timing margin is identified during calibration. Since the phase of the normal receive clock of the master is pre-determined and the position of the slave's clock edges can be found in the calibration period, the identification of the maximum timing margin is simply based on a digital comparison at the master device 22. Similarly, the master device 22 chooses the positive or negative edge of the slave's receive clock that results in the maximum timing margin on the slave receivers. Both the master transmit clock phase and the slave edge positions can be determined during the calibration period.

The highest peak bandwidth achievable by this system is one half of the synchronous bus system that transmits two bits of data per clock cycle. Nevertheless, its lower power consumption and simpler control scheme make this embodiment appealing for selected applications.

Those skilled in the art will recognize many alternate embodiments for the disclosed invention. For example, the invention was described in connection with a calibration technique that relied upon a clock signal. The calibration operation may also be performed with a random signal, as long as the universal phase aligner 30 can identify periodic signal edges associated with the random signal.

The foregoing description, for purposes of explanation, used specific nomenclature to provide a thorough understanding of the invention. However, it will be apparent to one skilled in the art that the specific details are not required in order to practice the invention. In other instances, well known circuits and devices are shown in block diagram form in order to avoid unnecessary distraction from the underlying invention. Thus, the foregoing descriptions of specific embodiments of the present invention are presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, obviously many modifications and variations are possible in view of the above

teachings. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the
5 scope of the invention be defined by the following claims and their equivalents.

CA1 - 211485.1

IN THE CLAIMS:

1. A method of operating a master/slave system, said method comprising the steps of:
- 5 identifying a master receive data phase value to coordinate the transfer of data from a slave device without phase alignment circuitry to a master device with a universal phase aligner;
- transferring data from said slave device to said master device in accordance with said master receive data phase value;
- 10 characterizing a master transmit data phase value to coordinate the transfer of data from said master device to said slave device; and
- routing data from said master device to said slave device in accordance with said master transmit data phase value.
- 15 2. The method of claim 1 wherein said identifying step includes the steps of:
- applying an alignment signal from said slave device to said master device; and
- aligning a receive data clock signal with said alignment signal to obtain said master receive data phase value.
- 20 3. The method of claim 2 wherein said identifying step further includes the steps of:
- applying a margin offset to said master receive data phase value; and
- storing said master receive data phase value.
- 25 4. The method of claim 1 wherein said transferring step includes the steps of:
- adjusting a system clock signal in accordance with said master receive data phase value to obtain a master receive data clock; and
- receiving data at said master device in response to said master receive data clock.
- 30 5. The method of claim 1 wherein said characterizing step includes the steps of:

routing request bus data received at said slave device to said master device to form re-routed request bus data; and

aligning a receive data clock signal with said re-routed request bus data to obtain said master transmit data phase value.

5

6. The method of claim 5 wherein said characterizing step further includes the steps of:

applying a margin offset to said master transmit data phase value; and
storing said master transmit data phase value.

10

7. The method of claim 1 wherein said aligning step includes the steps of:

adjusting a system clock signal in accordance with said master transmit data phase value to obtain a master transmit data clock; and

transmitting data from said master device in response to said master transmit
15 data clock.

8. A method of operating a master/slave system, said method comprising the steps of:

assessing a phase delay required for synchronized communication between a
20 master device with a universal phase aligner and a slave device without phase alignment circuitry; and

communicating data between said master device and said slave device in accordance with said phase delay.

25 9. The method of claim 8 wherein said assessing step includes the step of assigning, based upon said phase delay, a first data signal edge that said slave device does not process and a second data signal edge that said slave device does process.

10. The method of claim 8 wherein said assessing step includes the step of
30 assessing a plurality of phase delays required for synchronized communication between said master device and a corresponding plurality of slave devices.

11. The method of claim 10 wherein said communicating step includes the step of identifying a selected phase delay of said plurality of phase delays for communication with a selected slave device of said plurality of slave devices, wherein said communicating step is performed in accordance with said selected phase delay.

5

12. The method of claim 11 further comprising the step of designating a selected slave device of said plurality of slave devices for communication with said master device.

10 13. The method of claim 12 wherein said designating step includes the step of applying a control signal to a side band bus linking said plurality of slave devices.

14. The method of claim 12 wherein said designating step includes the step of applying a control signal to a request bus linking said plurality of slave devices.

15

15. A master/slave system, comprising:

a plurality of slave devices, each slave device including a clock circuit without phase alignment circuitry; and

a master device with a universal phase alignment circuit including a phase value register bank storing a plurality of phase values for said plurality of slave devices, said master device utilizing a selected phase value of said plurality of phase values to alter a system clock signal in accordance with said selected phase value so as to establish synchronous communication between said master device and a selected slave device of said plurality of slave devices.

25

16. The master/slave system of claim 15 wherein said master device utilizes a first selected phase value to alter said system clock signal to establish a master receive data clock signal to receive data from said selected slave device.

30 17. The master/slave system of claim 16 wherein said master device utilizes a second selected phase value to alter said system clock signal to establish a master transmit data clock signal to transmit data to said selected slave device.

18. The master/slave system of claim 15 wherein said master device performs a calibration operation in connection with each slave device of said plurality of slave devices to identify said plurality of phase values.

5 19. The master/slave system of claim 18 wherein said master device adds an offset value to each phase value of said plurality of phase values.

20. In a system comprising a master and at least one slave, the master and at least one slave coupled to a common bus, an auxiliary channel and a common clock, the
10 method of phase aligning an internal clock in the master device and derived from the common clock to enable communication over the data bus with the at least one slave, the method comprising the steps of:

the master causing the at least one slave device to emit a periodic data signal on the data bus by sending a command to the at least one slave device on the auxiliary
15 channel;

the master receiving and sampling the periodic data signal with the internal clock;

the master making a phase adjustment to the internal clock based on the sampled periodic signal to determine a phase boundary of the periodic data signal;

20 the master storing the value of the phase adjustment in a storage device of the master; and

the master adjusting the phase of the internal clock by the stored phase adjustment value plus an offset to receive data substantially without error from the at least one slave device.

ABSTRACT

A method of operating a master/slave system includes the step of identifying a master receive data phase value to coordinate the transfer of data from a slave device without phase alignment circuitry to a master device with a universal phase aligner.

- 5 Data is transferred from the slave device to the master device in accordance with the master receive data phase value. The master device characterizes a master transmit data phase value to coordinate the transfer of data from the master device to the slave device. Subsequently, the master device routes data to the slave device in accordance with the master transmit data phase value.

9797-0022-999

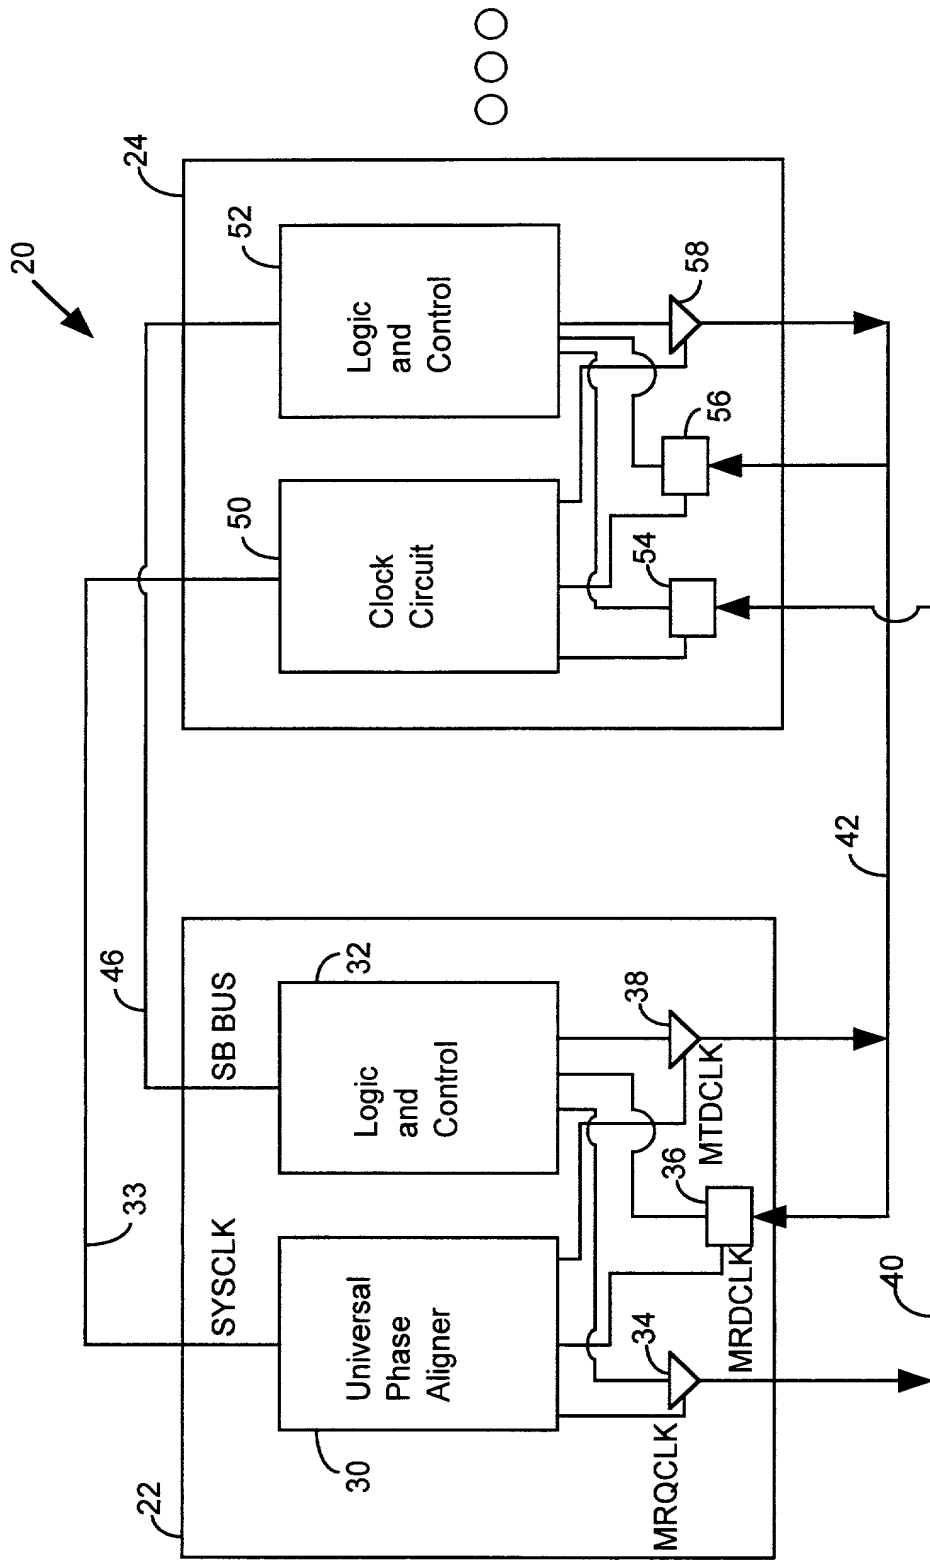


Figure 1

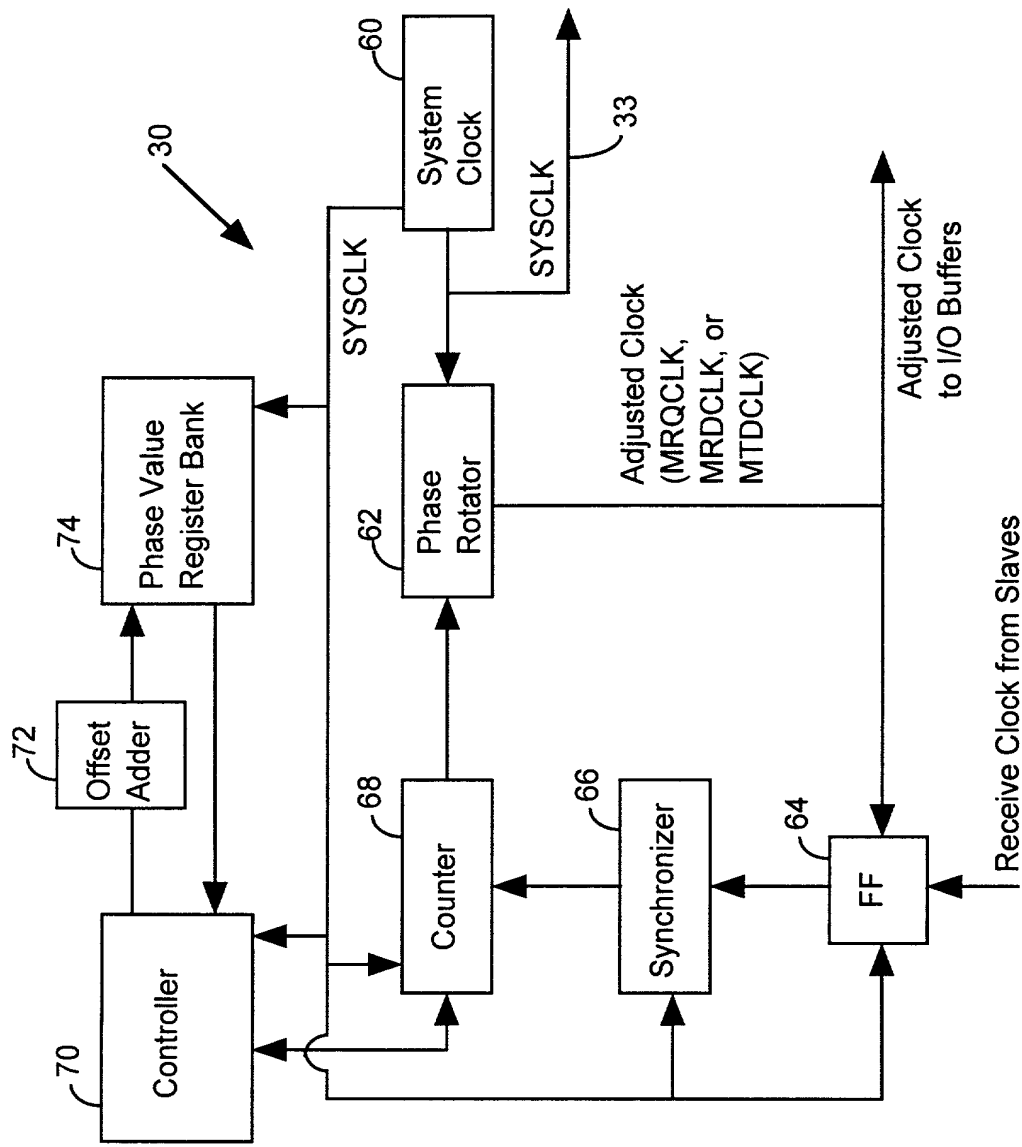


Figure 2

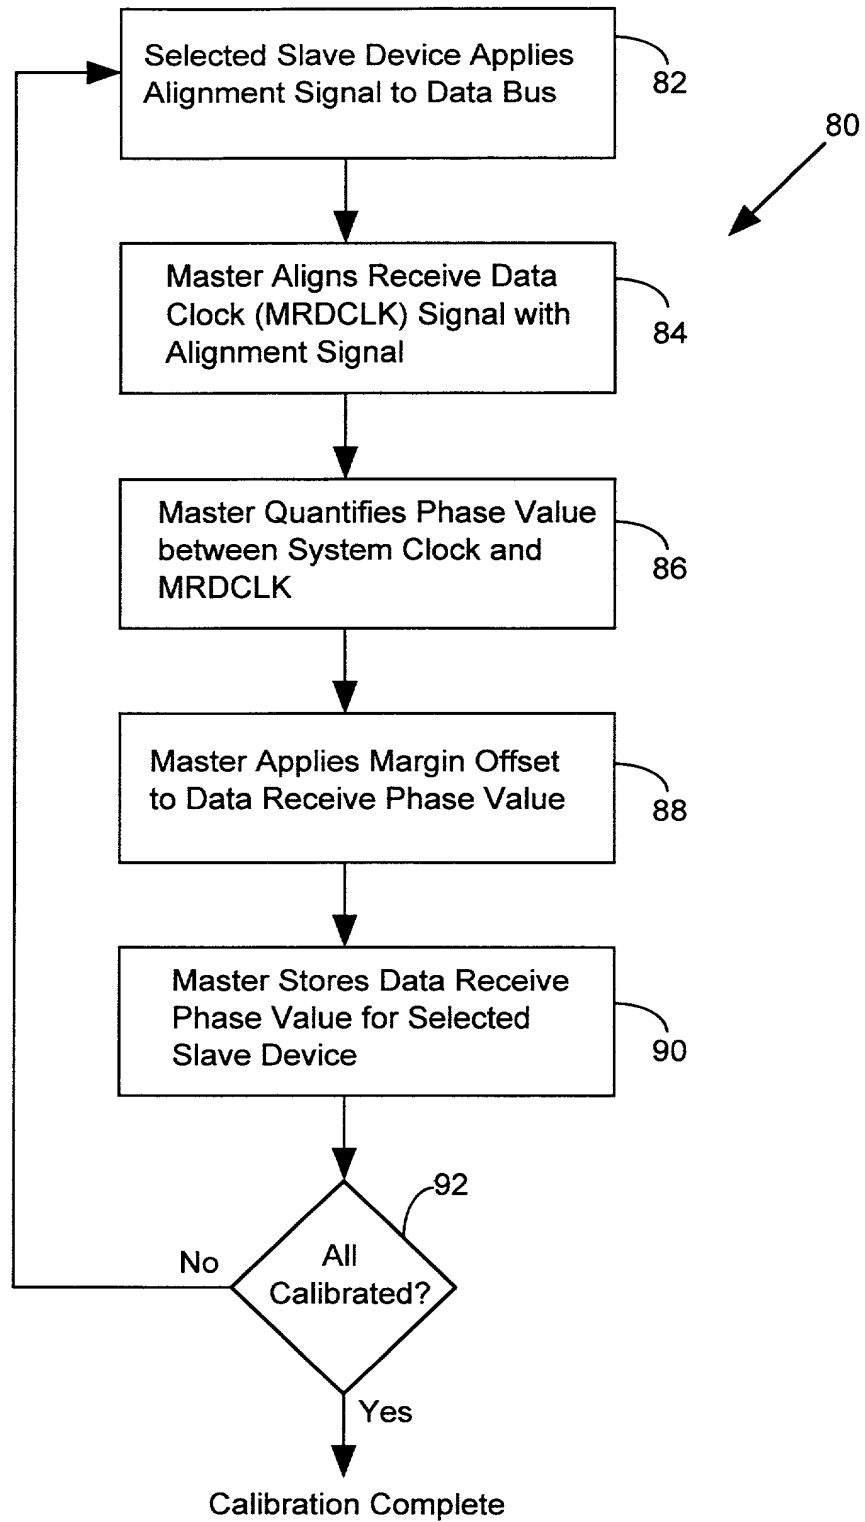


Figure 3

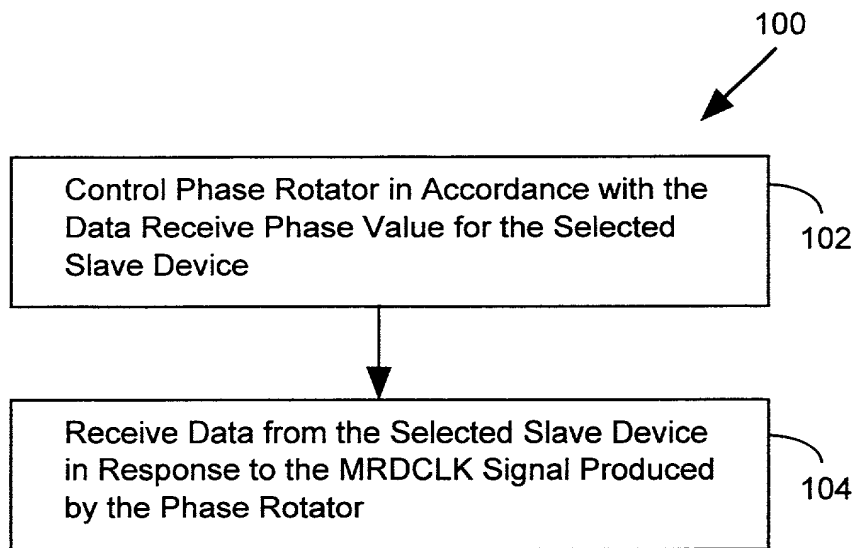


Figure 4

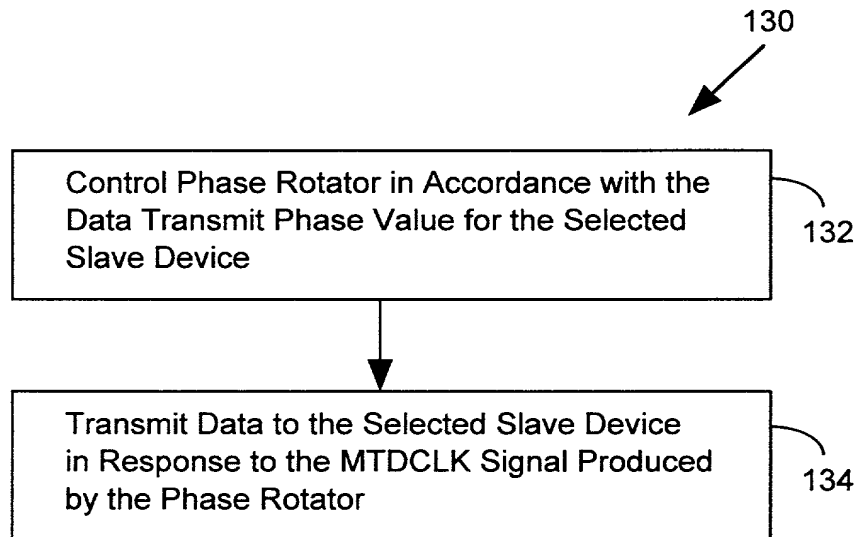


Figure 6

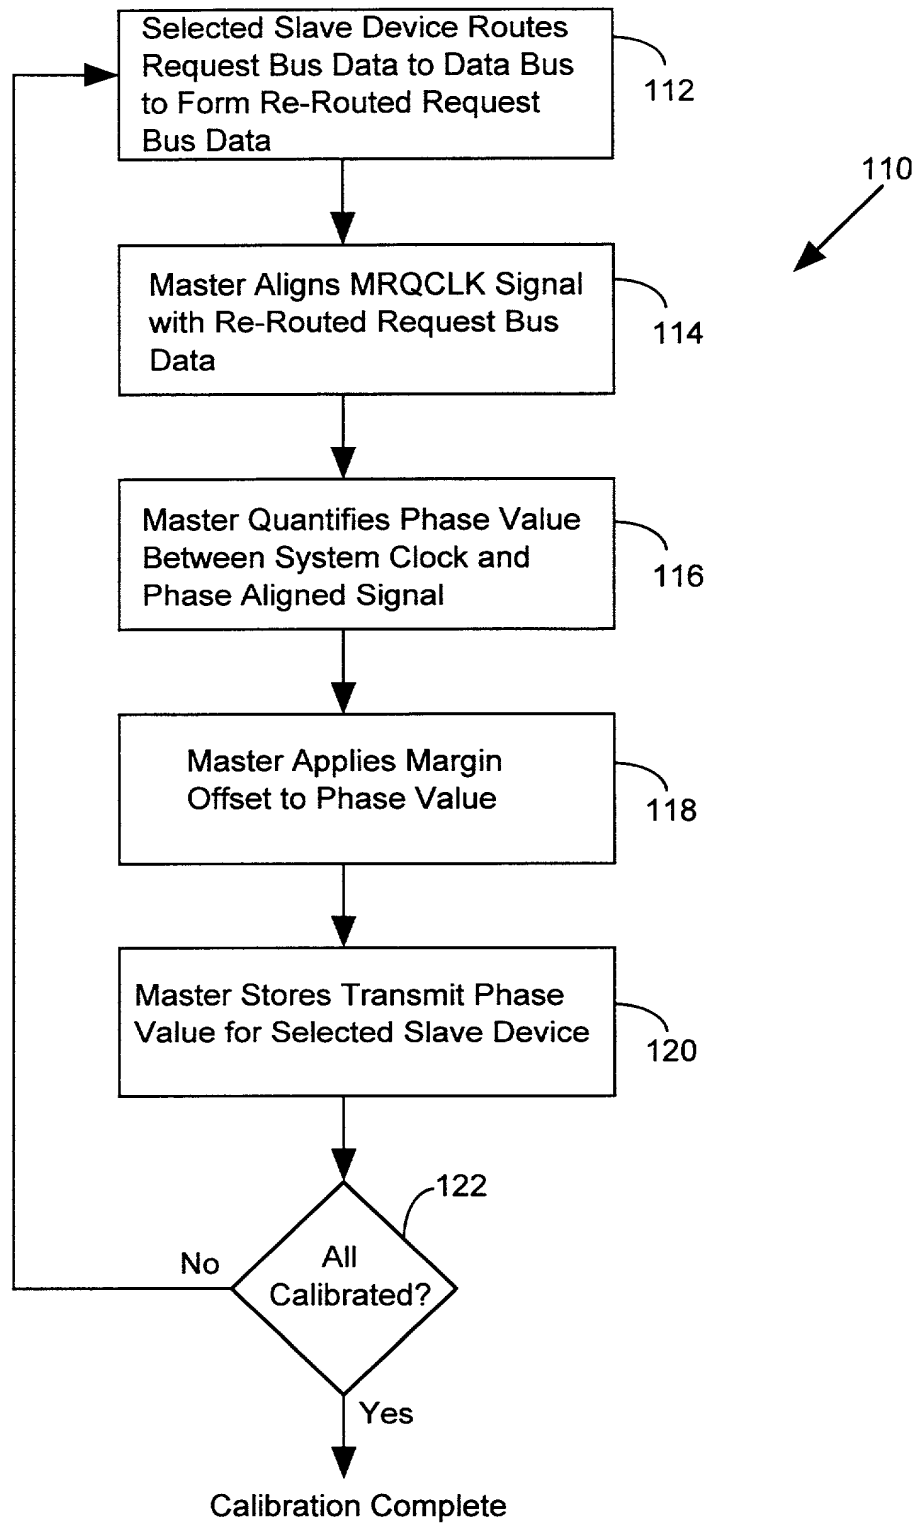


Figure 5

DECLARATION FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ***Apparatus and Method for Controlling a Master/Slave System via Master Device Synchronization*** the specification of which

☒ is attached hereto.

☐ was filed on _____ as Application Serial No. _____
and was amended on _____. (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			<u>Priority Claimed</u>	
_____	_____	_____	Yes <input type="checkbox"/>	No <input type="checkbox"/>
(Number)	(Country)	(Date Filed)		

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

_____	_____
(Application Serial No.)	(Filing Date)

Direct all telephone calls to William S. Galliani at (650) 493-4935. Address all correspondence to:

PENNIE & EDMONDS LLP
1155 Avenue of the Americas
New York, NY 10036-2711

File No. 9797-022-999

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or
first inventor:

Stefanos Sidiropoulos

Inventor's signature:



Date:

7/1/99

Residence:

731 Ellsworth Street, Palo Alto, CA 94306

Citizenship:

Greece

Post Office Address:

731 Ellsworth Street

Palo Alto, CA 94306

POWER OF ATTORNEY BY ASSIGNEE

To the Assistant Commissioner for Patents:

The undersigned assignee of the entire interest in application for letters patent entitled:
Apparatus and Method for controlling a Master/Slave System via Master Device Synchronization filed
herewith, and having the named inventor:

STEFANOS SIDIROPOULOS

hereby appoints the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith; said appointment to be to the exclusion of the inventor(s) and his (their) attorney(s) in accordance with the provisions of 37 C.F.R. 1.32: S. Leslie Misrock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), Gerald J. Flintoft (Reg. No. 20823), David Weild, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lauter, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodell (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Jon R. Stark (Reg. No. 30111), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31232), Victor N. Balancia (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30893), Paul J. Zegger (Reg. No. 33821), Edmond R. Bannon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Antler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), James G. Markey (Reg. No. 31636), Thomas D. Kohler (Reg. No. 32797), Scott D. Stimpson (Reg. No. 33607), Ann L. Gisolfi (Reg. No. 31956), Mark A. Farley (Reg. No. 33170), Gary S. Williams (Reg. No. 31066) and William S. Galliani (Reg. No. 33885), provided that if any one of said attorneys ceases being affiliated with the law firm of Pennie & Edmonds LLP as partner, employee or of counsel, such attorney's appointment as attorney and all powers derived therefrom shall terminate on the date such attorney ceases being so affiliated.

In accordance with 37 CFR 3.73 the assignee hereby certifies that the evidentiary documents with respect to its ownership have been reviewed and that, to the best of assignee's knowledge and belief, title is in the assignee seeking to take this action.

Direct all telephone calls to William S. Galliani at (650) 493-4935. Address all correspondence to:

PENNIE & EDMONDS LLP
1155 Avenue of the Americas
New York, NY 10036-2711

Assignee: RAMBUS INCORPORATED


By: Joel Karp

Date: 7/2/99

Signature: _____

Title: _____

Address: _____


Vice President, Intellectual Property
2465 Latham Street
Mountain View, CA 94040